



CONFIDENTIAL

Blanking Schematic for GB CDE & GB ACME Box

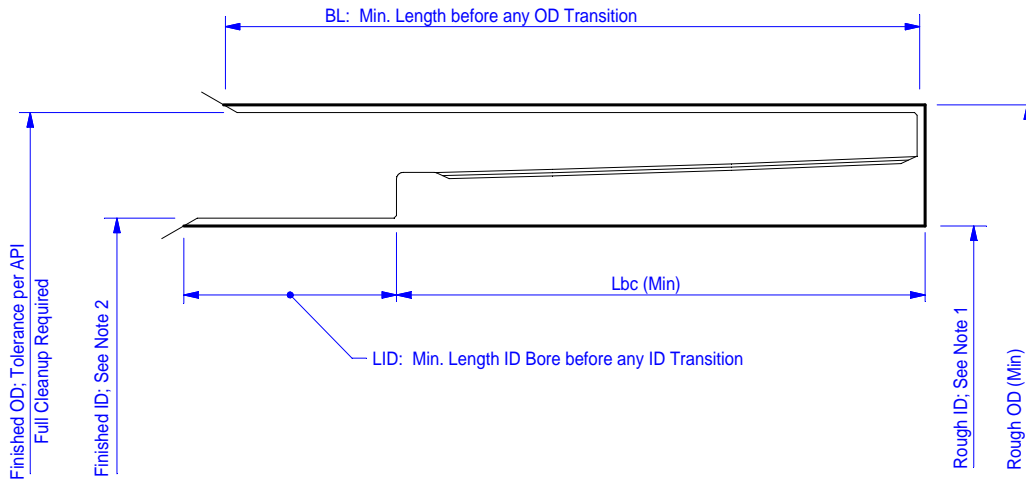

Blanking Schematic for GB DWC & GB ACME Pins

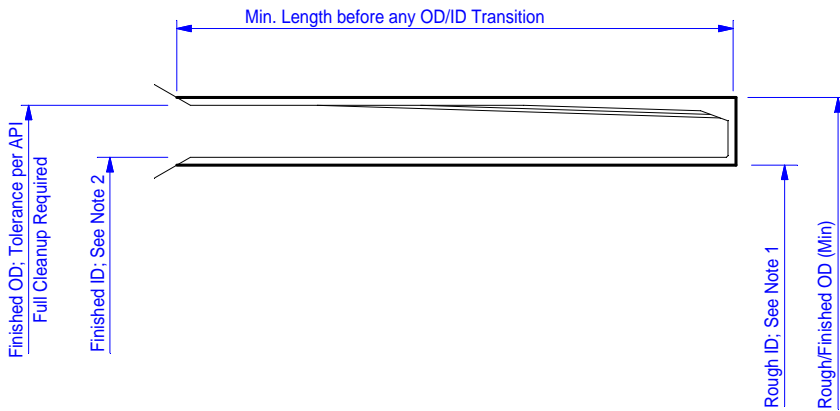

NOTES:

1. Rough ID - Machine to API Drift Diameter for Pipe Body +0.030-0.000.
2. Finished ID - To match corresponding Pipe ID ± 0.010 .
3. See Table GB DWC Blanking for size specific dimensions.
4. Blanking Schematics shown are applicable to GB Butt, GB 4P and GB 3P Threads.

Units: inches

BLANKING DIMENSIONS FOR GB CD/CDE & GB ACME CONNECTIONS



950 Threadneedle St. Ste 130 - Houston, Texas 77049
 (713) 465-3585 Toll Free: 1-888-245-3848 Fax: (713) 984-1529

Date:	11/28/2006
Scale:	AS SHOWN
Drawing No.:	GBDWC700.0
Revision:	Rev. 0 (07/11/2017)
Filename:	GBDWC700 Rev 0

Table: GB DWC Blank

GB Drilling With Casing (DWC) Connection Blanking Dimensions

GB CD/CDE Pins			
Pipe OD (in)	Rough/Finished OD <i>Minimum</i> (in)	Min. Length before any OD/ID Transition (in)	Min. Length Recut (in)
Buttress Threads			
4 1/2	4.516	4.813	2.572
5	5.016	4.938	2.572
5 1/2	5.516	5.000	2.572
6	6.016	5.188	2.572
7	7.016	5.375	2.572
7 5/8	7.641	5.563	2.572
9 5/8	9.641	5.688	2.572
10 3/4	10.766	5.688	2.572
11 3/4	11.766	5.688	2.572
13 3/8	13.391	5.688	2.572
16	16.016	5.688	2.040
18 5/8	18.641	5.688	2.040
20	20.016	5.688	2.040
4P Threads			
10 3/4	10.766	5.688	2.572
11 3/4	11.766	5.688	2.572
13 3/8	13.391	5.688	2.572
3P Threads			
16	16.016	5.688	2.247
18 5/8	18.641	5.688	2.247
20	20.016	5.688	2.247

Finished ID per API Specifications for casing size and weight shall meet API Specified ID and drift diameter.

GB CDE Box							
Pipe OD (in)	Pipe Weight (1) (lbs)	Rough OD <i>Minimum</i> (in)	Finished OD (2) (in)	Min. Length before any OD/ID Transition (in)	Lbc <i>Minimum</i> (in)	Min. Length ID Bore before any ID Transition (in)	Min. Length Recut (in)
Buttress Threads							
4 1/2	≤ 16.60	5.280	5.200	6.238	4.048	1.700	4.063
5	≤ 21.40	5.880	5.800	6.363	4.173	1.700	4.188
5 1/2	≤ 23.00	6.380	6.300	6.425	4.235	1.700	4.250
6	≤ 26.00	6.955	6.875	6.800	4.223	1.700	4.238
7	≤ 35.00	7.955	7.875	6.800	4.610	1.700	4.625
7 5/8	≤ 39.00	8.580	8.500	6.988	4.798	1.700	4.813
9 5/8	≤ 53.50	10.705	10.625	7.250	4.985	2.000	5.000
10 3/4	≤ 55.50	11.830	11.750	7.250	4.985	2.000	5.000
11 3/4	≤ 65.00	12.830	12.750	7.250	4.985	2.000	5.000
13 3/8	≤ 72.00	14.455	14.375	7.250	4.985	2.000	5.000
16	≤ 109.00	17.080	17.000	7.250	4.985	2.000	5.000
18 5/8	≤ 109.40	19.705	19.625	7.250	4.985	2.000	5.000
20	≤ 133.00	21.080	21.000	7.250	4.985	2.000	5.000
4P Threads							
10 3/4	≤ 55.50	11.830	11.750	7.250	4.985	2.000	5.000
11 3/4	≤ 65.00	12.830	12.750	7.250	4.985	2.000	5.000
13 3/8	≤ 72.00	14.455	14.375	7.250	4.985	2.000	5.000
3P Threads							
16	≤ 109.00	17.080	17.000	7.250	4.985	2.000	5.000
18 5/8	≤ 109.40	19.705	19.625	7.250	4.985	2.000	5.000
20	≤ 133.00	21.080	21.000	7.250	4.985	2.000	5.000

Finished ID shall meet API Specified ID and drift diameter at coupling center section per API Specifications for casing size and weight.

- (1) For heavy wall casing, please contact GB Connections for OD requirement on the box end
- (2) Full OD cleanup is required

NOTE: All accessories requiring box threads shall be cut with GB CDE Boxes; NO EXCEPTIONS. Keep in mind, GB CDE Boxes are weight specific, so the ID at the center (dc) section must match the mating pipe/pin ID. Also, the center section (at pipe/pin ID) should extend at minimum 1.7" to 2" (as indicated in the table) before any ID transition in the accessory.



**Blanking Dimensions for
GB ACME Connections**

July 27, 2017
Rev. 0 (07/27/2017)

Table: GB ACME Blank

GB TCC ACME IS Connection Blanking Dimensions

GB TCC ACME / ACME IS Pins			
Pipe OD (in)	Rough/Finished OD <i>Minimum</i> (in)	Min. Length before any OD/ID Transition (in)	Min. Length Recut (in)
ACME Threads			
2 3/8	2.391	4.188	2.008
2 7/8	2.891	4.188	2.008
3 1/2	3.516	4.188	2.008
4 1/2	4.516	4.188	2.008

Finished ID per API Specifications for casing size and weight shall meet API Specified ID and drift diameter.

GB TCC ACME IS Box							
Pipe OD (in)	Pipe Weight (lbs)	Rough OD <i>Minimum</i> (in)	Finished OD (1) (in)	Min. Length before any OD Transition (in)	Lbc <i>Minimum</i> (in)	Min. Length ID Bore before any ID Transition (in)	Min. Length Recut (in)
ACME Threads							
2 3/8	≤ 5.80	2.938	2.875	5.000	3.470	1.500	3.470
2 7/8	≤ 8.60	3.563	3.500	5.000	3.470	1.500	3.470
3 1/2	≤ 12.70	4.313	4.250	5.000	3.470	1.500	3.470
4 1/2	≤ 15.10	5.263	5.200	5.000	3.470	1.500	3.470

Finished ID shall meet API Specified ID and drift diameter at coupling center section per API Specifications for tubing size and weight.

(1) Full OD cleanup is required

NOTE: All accessories requiring box threads shall be cut with GB ACME IS Boxes; NO EXCEPTIONS. Keep in mind, GB ACME IS Boxes are weight specific, so the ID at the center (dc) section must match the mating pipe/pin ID. Also, the center section (at pipe/pin ID) should extend at minimum 1.500" (as indicated in the table) before any ID transition in the accessory.